




scale:
dsnd:
drawn:
approved:

GENERAL NOTES:


1. STABILIZE SOIL BELOW ROOT BALL PRIOR TO PLANTING TO PREVENT TREE FROM SETTLING.
2. TOP OF ROOTBALL SHALL BE 1" TO 2" ABOVE FINISH GRADE.
3. ALL WIRE ROPE AND SYNTHETIC MATERIALS SHALL BE REMOVED COMPLETELY FROM ROOTBALL AND REMOVE TOP 1/3 OF BURLAP.
4. PLANTING PITS SHALL BE THOROUGHLY SCARIFIED/ROUGHENED.

CONSTRUCTION NOTES:

- A. TREE.
- B. 3" DEPTH OF BARK MULCH; NO MULCH WITHIN 2" OF TRUNK
- C. WATER RETENTION BASIN.
- D. FINISH GRADE
- E. UNDISTURBED SOIL BELOW ROOT BALL
- F. LOOSEN NATIVE BACKFILL (NO SOIL AMENDMENTS IN CONTRACT)
- G. TREE STAPLE (3 PER TREE) - SIZED AND INSTALLED PER MANUFACTURER'S RECOMMENDATIONS

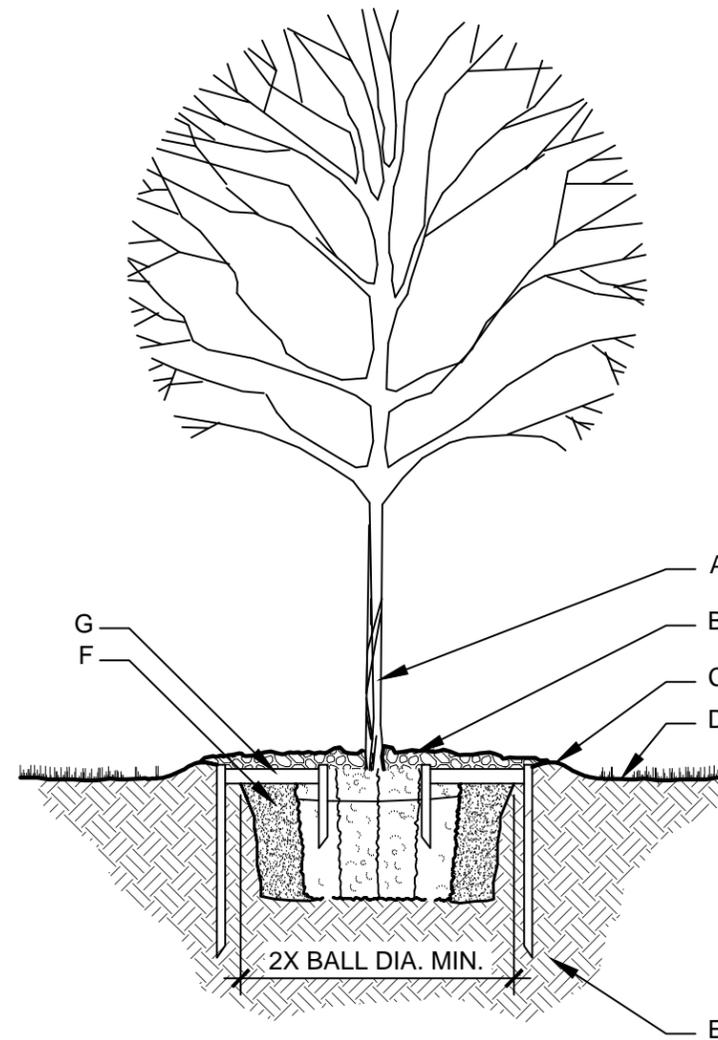

SECTION

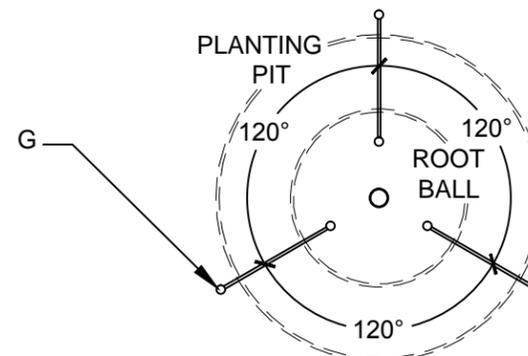

PLAN

F TREE PLANTING DETAIL
2

NOT TO SCALE

Standard Construction Details

for
City of Dallas
Park and Recreation Department

Typical Construction Details

LANDSCAPE
DETAILS

TREE
PLANTING
DETAIL

issue date

revisions

DETAIL F-2