



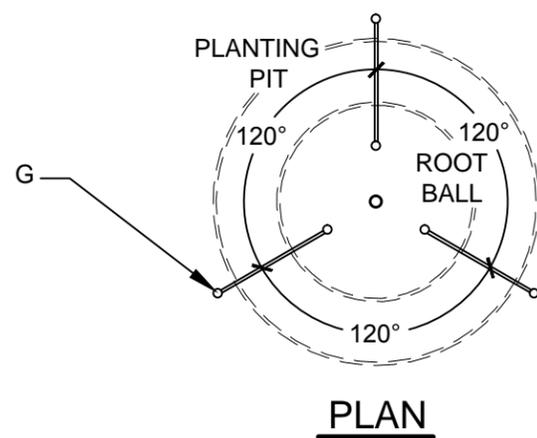

scale:
dsnd:
drawn:
approved:

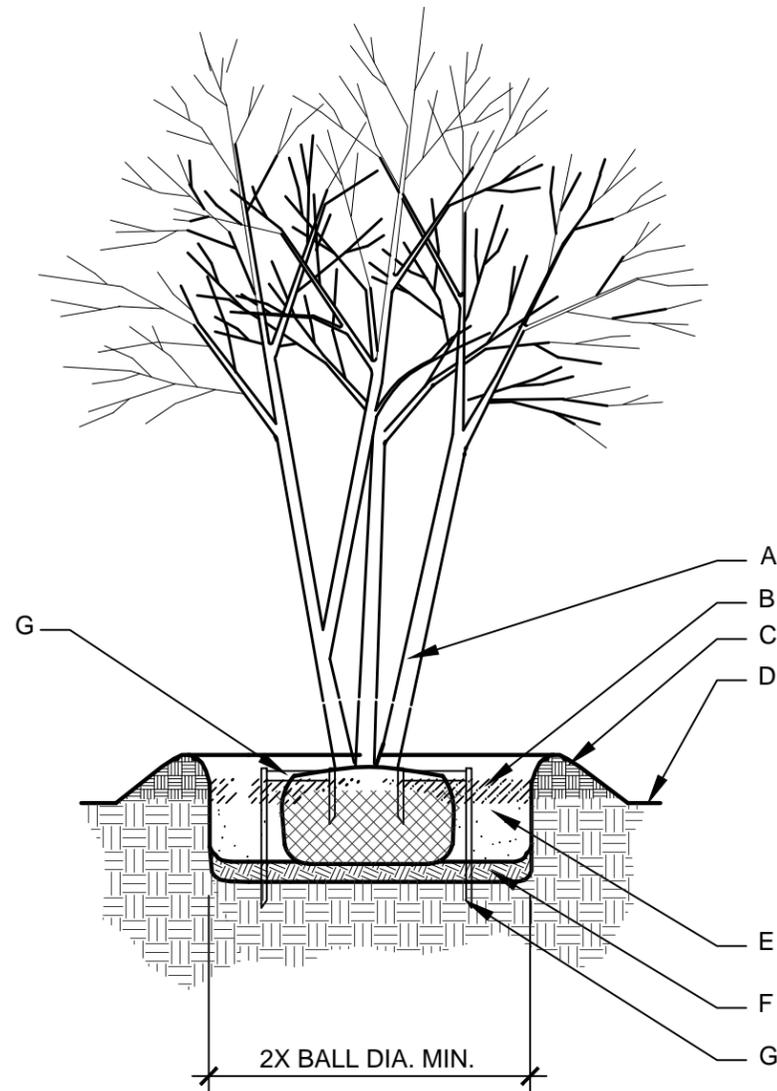

GENERAL NOTES:

1. STABILIZE SOIL BELOW ROOT BALL PRIOR TO PLANTING TO PREVENT TREE FROM SETTLING.
2. TOP OF ROOTBALL SHALL BE 1" TO 2" ABOVE FINISH GRADE.
3. ALL WIRE ROPE AND SYNTHETIC MATERIALS SHALL BE REMOVED COMPLETELY FROM ROOTBALL AND REMOVE TOP 1/3 OF BURLAP.
4. PLANTING PITS SHALL BE THOROUGHLY SCARIFIED/ROUGHENED.

CONSTRUCTION NOTES:

- A. TREE
- B. 3" DEPTH OF BARK MULCH; NO MULCH WITHIN 2" OF TRUNK
- C. WATER RETENTION BASIN - USE PREPARED TOPSOIL (6" MINIMUM)
- D. FINISH GRADE
- E. PREPARED ADMIXTURE BACKFILL OR NATIVE SOIL
- F. TAMPERED ADMIXTURE BACKFILL
- G. TREE STAPLE (3 PER TREE) - SIZED AND INSTALLED PER MANUFACTURER'S RECOMMENDATIONS

Standard Construction Details

for
City of Dallas
Park and Recreation Department

Typical Construction Details

LANDSCAPE
DETAILS

ORNAMENTAL
TREE
PLANTING
DETAIL

issue date

revisions

F
3 ORNAMENTAL TREE PLANTING DETAIL

NOT TO SCALE

DETAIL F-3