



scale:
dsnd:
drawn:
approved:

Standard Construction Details

for
City of Dallas
Park and Recreation Department

Typical Construction Details


LANDSCAPE
DETAILS

TREE
BUBBLER
DETAIL

issue date

revisions

DETAIL F-14

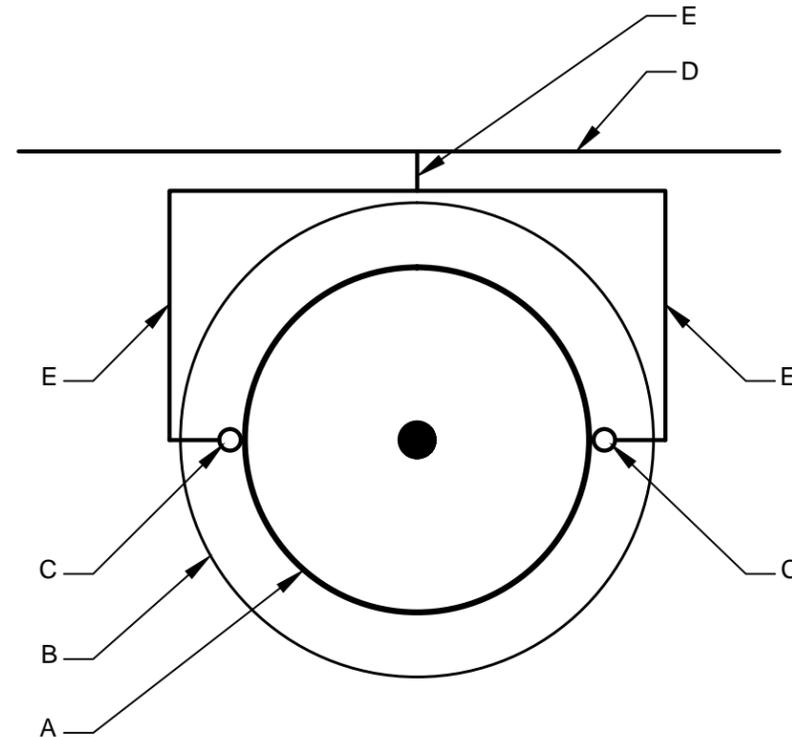

GENERAL NOTES:

1. NO TRENCHING ALLOWED WITHIN THE TREE ROOTBALL.
2. TREE BUBBLERS TO BE ON UPHILL SIDE OF THE TREE IN THE RETENTION BASIN OR AS SHOWN.
3. COORDINATE THE LOCATION OF THE BUBBLERS WITH THE PROPOSED TREES.
4. BUBBLER TO BE EITHER 1 GPM FLOOD BUBBLER OR 8' RAD. QUARTER THROW NOZZLES (REF. PLAN AND SPECIFICATIONS).

CONSTRUCTION NOTES:

- A. TREE ROOTBALL
- B. EDGE OF TREE PIT (RETENTION BASIN)
- C. POP-UP SPRAY HEAD W/ TREE BUBBLER
- D. LATERAL LINE (SIZED AS SPEC'D.)
- E. 1/2" ZONE PIPE

GENERAL NOTES:

1. FOR TREE INSTALLATIONS, DRIP IRRIGATION MAY BE USED IN LIEU OF FLOOD BUBBLERS. CONTRACTOR TO PROVIDE FULL SHOP DRAWINGS FOR ALTERNATE DESIGN. REFERENCE TECHNICAL SPECIFICATIONS FOR DESIGN MODIFICATION PROCEDURES AND APPROVALS.

F TREE BUBBLER DETAIL
14

NOT TO SCALE