




# City of Dallas Park and Recreation Department Project Title

Project Title

Date

Project Name

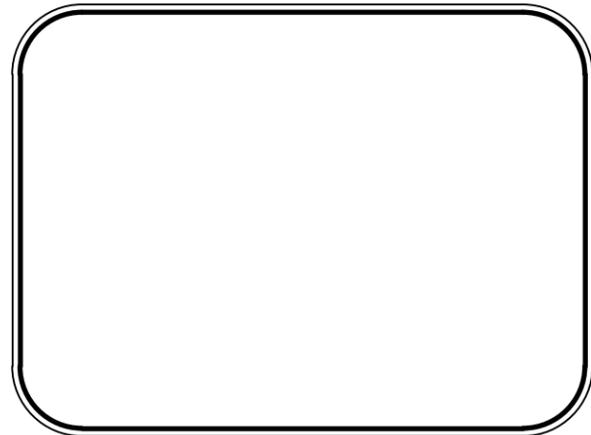

LOCATION MAP-MAPSCO XXX  
NOT TO SCALE

Dallas, Texas 75201

PREPARED FOR: \_\_\_\_\_

CITY OF DALLAS  
PARK AND RECREATION DEPT.  
CITY HALL ROOM 6-FS  
1500 MARILLA STREET  
DALLAS, TEXAS 75201  
(214) 670-5454  
(214) 670-4286 (FAX)

PREPARED BY: \_\_\_\_\_

NAME  
ADDRESS  
CITY, STATE ZIP  
PHONE NUMBER  
FAX NUMBER

### GENERAL CONSTRUCTION NOTES

### RECOMMENDED FOR APPROVAL:

1. THE CITY OF DALLAS "CITY SPECIFICATIONS" IS MADE UP OF THE CURRENT VERSIONS OF THE (a) STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION FOR NORTH CENTRAL TEXAS (NCTCOG), (b) CITY OF DALLAS SPECIAL PROVISIONS WHICH MODIFY THE STANDARD SPECIFICATIONS AND (c) CITY OF DALLAS STANDARD CONSTRUCTION PARK DETAILS (CALLED STANDARD DETAILS). THE "CITY SPECIFICATIONS" SHALL BE MADE A PART OF THESE CONSTRUCTION PLANS AND ARE APPLICABLE TO CONSTRUCTION INSPECTED BY THE PUBLIC WORKS INSPECTORS.
2. IN THE EVENT AN ITEM IS NOT COVERED IN THE "CITY SPECIFICATION" OR "TECHNICAL SPECIFICATION" THE CONTRACTOR SHALL NOTIFY THE CITY AND THE CITY APPROVE ANY ADDITIONS OR MODIFICATIONS TO THE SPECIFICATIONS.
3. ALL WASTE MATERIAL AND/OR EXCESS EXCAVATION NOT USED AS PART OF THE WORK SHALL BE REMOVED FROM THE JOB SITE AND DISPOSED OF AT ACCEPTABLE LOCATIONS IN ACCORDANCE WITH ALL LOCAL, STATE AND FEDERAL REGULATIONS.
4. THE CONTRACTOR SHALL BE REQUIRED, AT ALL TIMES, DURING THE CONSTRUCTION TO PROVIDE WARNING SIGNS, BARRICADES, AND OTHER SAFETY DEVICES (INCLUDING TEMPORARY SAFETY FENCING AROUND THE JOB SITE) IN ORDER TO PROTECT THE PUBLIC SAFETY AND HEALTH UNTIL ALL OF THE WORK HAS BEEN COMPLETED AND ACCEPTED.

5. THE CONTRACTOR SHALL BE RESPONSIBLE FOR LOCATING ALL UTILITIES, INCLUDING THE FRANCHISE UTILITIES, AND UNDERGROUND STRUCTURES WHETHER OR NOT THEY ARE SHOWN ON THE PLANS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL DAMAGE TO THESE EXISTING UTILITIES OR STRUCTURES CAUSED BY HIS FORCES AND SHALL REPAIR ANY DAMAGE TO THEM CAUSED DURING THIS WORK, AT NO COST TO THE CITY.
6. THE CONTRACTOR IS RESPONSIBLE FOR PROTECTION OF ALL EXISTING FACILITIES IN AND AROUND THE PROJECT AREA. THESE INCLUDE TREES, PLANTINGS, CONCRETE PAVING, BENCHES, SIGNS AND OTHER FACILITIES FOUND ON SITE. THE CONTRACTOR SHALL REPAIR OR REPLACE, AT NO COST TO THE CITY, ANY FACILITIES DAMAGED DURING CONSTRUCTION OF THESE IMPROVEMENTS.
7. THE CONTRACTOR SHALL BE RESPONSIBLE FOR CARE OF ALL WATER DURING CONSTRUCTION. ALL PERMANENT WORK SHALL BE CONSTRUCTED IN AREAS FREE FROM WATER. THE CONTRACTOR SHALL CONSTRUCT AND MAINTAIN ALL DITCHES, LEVEES, COFFER DAMS, DIVERSIONS, PUMPS ETC. AS NECESSARY TO KEEP THE WORK AREAS FREE FROM WATER.
8. THE CONTRACTOR SHALL PROVIDE WARNING SIGNS AND BARRICADES AT LOCATIONS WHERE EXISTING SIDEWALK HAS BEEN REMOVED.
9. THE CONTRACTOR SHALL WORK TO MINIMIZE DAMAGE TO EXISTING PLANT MATERIALS BEHIND AND ABOVE PLANTER WALLS. WHOLESALE REMOVAL OF PLANTS WILL NOT BE ALLOWED. EXCESS DAMAGE TO PLANT MATERIALS WILL BE REPLACED BY CONTRACTOR

\_\_\_\_\_  
Sr. Program Manager, Engineering, and Site Development      Date

\_\_\_\_\_  
Assistant Director, Planning, Design and Construction      Date

Date \_\_\_\_\_ Volume \_\_\_\_\_ Page \_\_\_\_\_

\_\_\_\_\_  
Secretary, Park and Recreation Board