





scale:
dsnd:
drawn:
approved:

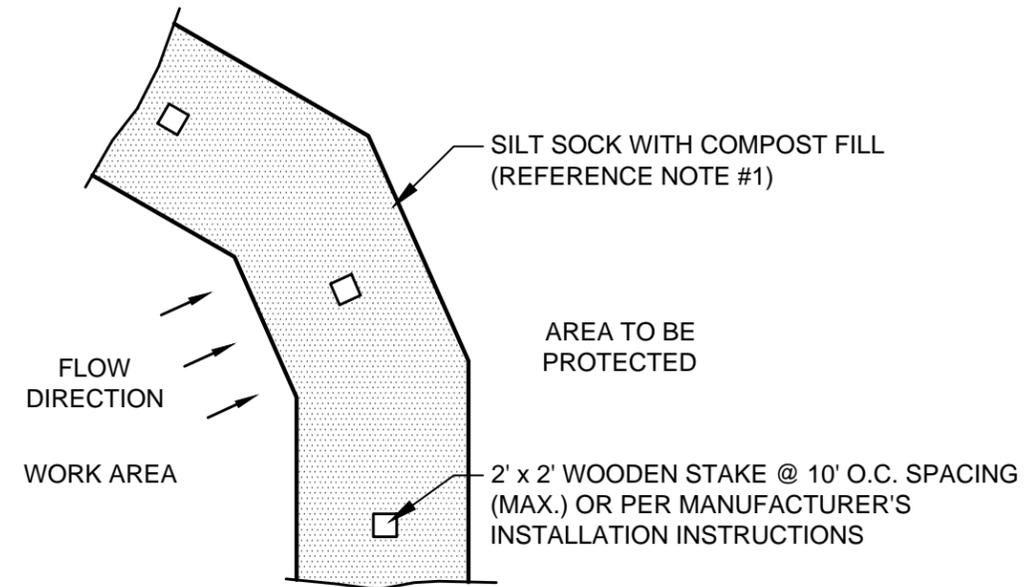

PLAN

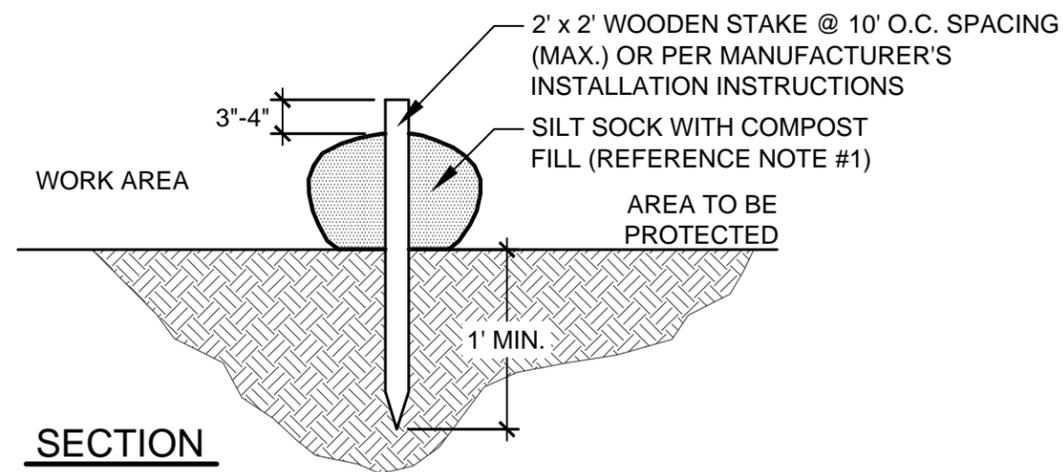

SECTION

SILT SOCK NOTES:

1. REFERENCE PLAN AND/OR TECHNICAL SPECIFICATIONS FOR SILT SOCK SIZE, FILL MATERIAL AND APPROVED MANUFACTURERS.
2. THE SILT SOCK SHALL BE PLACED AT LOCATIONS INDICATED ON PLANS AND SHOULD BE INSTALLED PARALLEL TO THE BASE OF THE SLOPE OR OTHER AFFECTED AREA.
3. CONTRACTOR IS RESPONSIBLE FOR ESTABLISHING A WORKING EROSION CONTROL SYSTEM AND MAY, WITH APPROVAL OF THE OWNER'S REPRESENTATIVE, WORK OUTSIDE THE MINIMUM CONSTRUCTION REQUIREMENTS AS NEEDED.
4. THE CONTRACTOR SHALL MAINTAIN THE SILT SOCK IN A FUNCTIONAL CONDITION AT ALL TIMES AND IT SHALL BE ROUTINELY INSPECTED. REPAIR OR REPLACEMENT SHALL BE MADE PROMPTLY AS NEEDED.
5. THE CONTRACTOR SHALL REMOVE SEDIMENTS COLLECTED AT THE BASE OF THE SILT SOCK WHEN THEY REACH 1/3 OF THE EXPOSED HEIGHT OF THE DEVICE OR AS DIRECTED BY THE OWNER'S REPRESENTATIVE. SEDIMENT TRAPPED BY THIS PRACTICE SHALL BE DISPOSED OF IN AN APPROVED SITE IN A MANNER THAT WILL NOT CONTRIBUTE TO ADDITIONAL SILTATION.
6. THE COMPOST FILL WILL BE DISPERSED ON SITE WHEN NO LONGER REQUIRED, AS DETERMINED BY THE OWNER'S REPRESENTATIVE.

A SILT SOCK DETAIL
16

NOT TO SCALE

Standard Construction Details

for
City of Dallas
Park and Recreation Department

Typical Construction Details
PAVEMENT &
PARKING DETAILS

SILT SOCK
DETAILS

issue date

revisions

DETAIL A-16